

Monitor IIA

4-Way Speaker

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohms
- Power Rating: 45 to 250 watts RMS
- Frequency Response: 22Hz-28,000Hz +/-4dB



PHYSICAL SPECIFICATIONS:

- 1x - Walsh WTL Tweeter 10,000 through 28,000Hz
- 1x - 1-1/2" (3.8cm) Dome Midrange 450 to 5,000Hz
- 1x - 1" (2.5cm) Dome Midtweeter 5000 to 10,000Hz
- 1x - 12" (30.4cm) Woofer 22 to 450Hz
- Dimensions: 41-1/2"H x 15"W" x 13"D
105.4cm(H) x 38.1cm(W) x 33cm(D)
- Cabinet: Not Sold
- Grille: NLA
- Crossover: NLA
- Tweeter Level Control: #145-0103
- Logo: #716-0138

PRODUCTION HISTORY

- Introduced in 1975
- Discontinued 1979
- Original Retail Price: \$898.00/pair

TECHNICAL INFORMATION

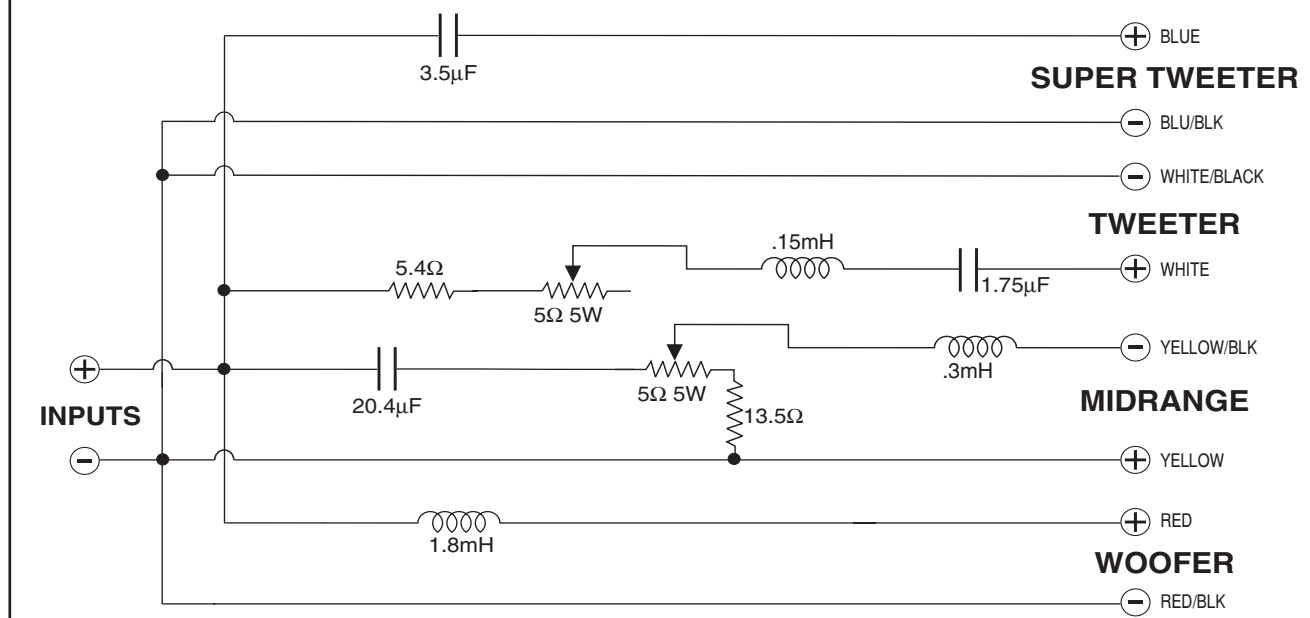

Monitor IIA 4-Way Speaker