

RSM

Reference Standard Series 3-Way

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4-8 ohms
- Power Rating: 30-250 watts RMS
- Sensitivity: 88dB @ 2.8 volts, 1 meter
- Crossover Frequencies: 500Hz and 5,000kHz
- Frequency Response: 42Hz-32kHz +/-3dB


PRODUCTION HISTORY

- Introduced in 1979
- Discontinued 1984
- Original Retail Price: \$656.00/pair

PHYSICAL SPECIFICATIONS:

- 1x - EMIT Tweeter
- 1x - 5" (12.5cm) Polypropylene Midrange
- 1x - 12" (30cm) Woofer with Polypropylene Cone and 2" Phosphor-Bronze Voice-Coil Former
- Dimensions: 26-1/2"H x 15"W" x 10"D
67cm(H) x 38cm(W) x 25cm(D)
- Cabinet Not Sold
- Grille #A025-0407
- Control Tweeter #145-0103
- Control Midrange #145-0110
- Crossover NLA
- Logo #716-0340

TECHNICAL INFORMATION

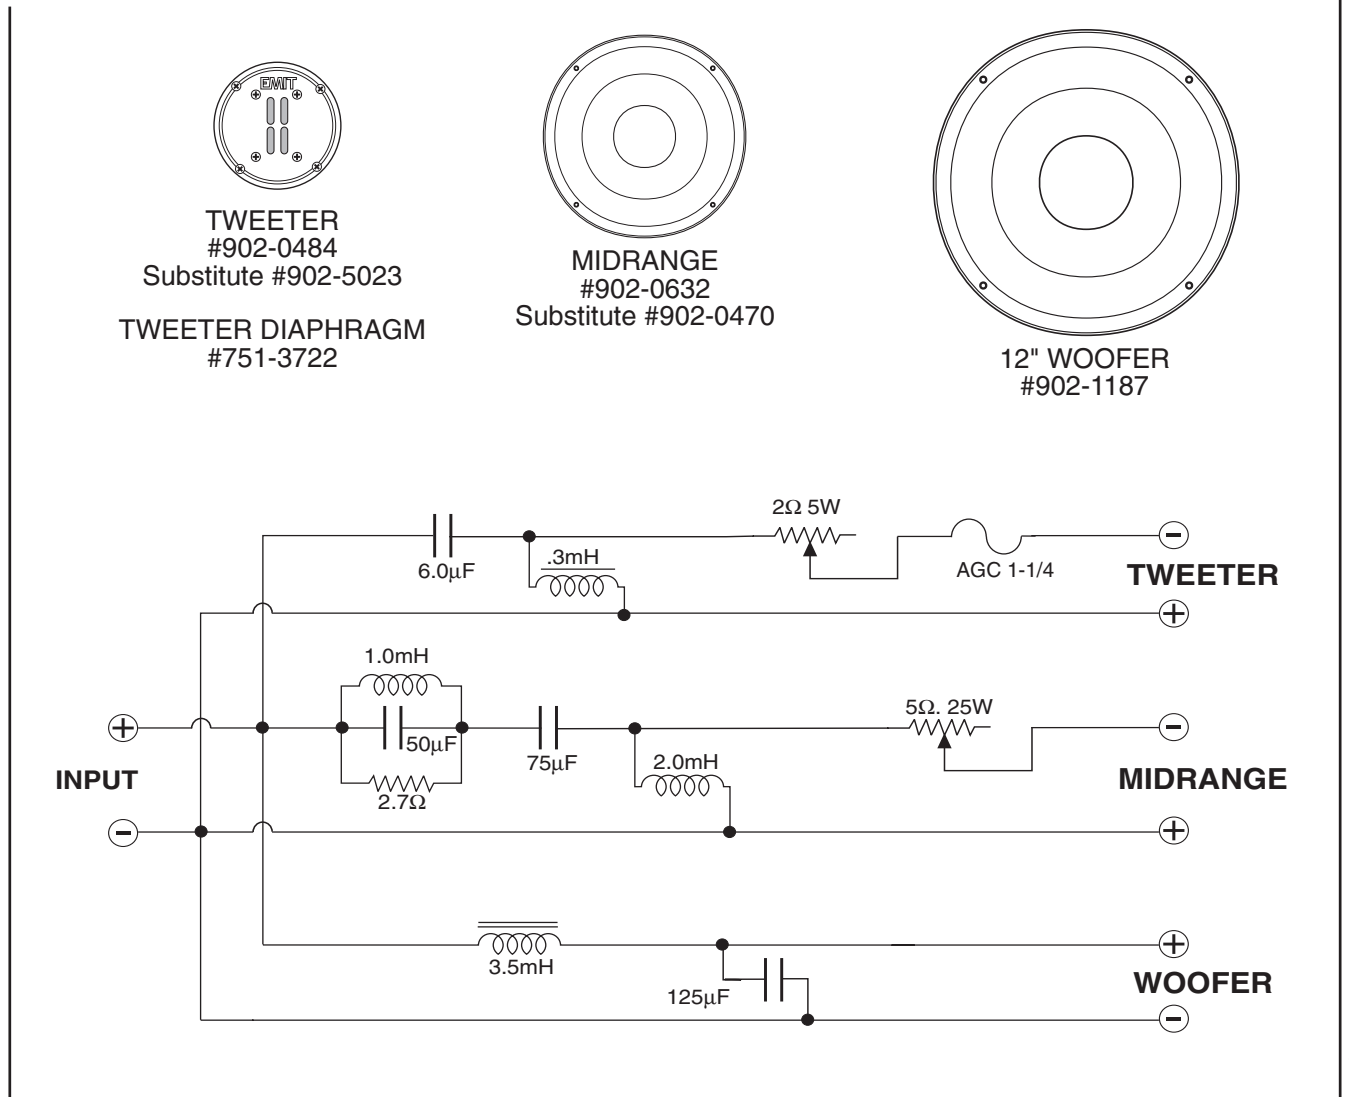

RSM Reference Standard 3-Way